



POLYKEN® 107
Double-Coated Cloth Tape w/
Differential Adhesive


APPLICATIONS

- Carpet hold-down specially designed for carpet-to-carpet and carpet-to-tile application in the convention industry.
- Multi-purpose use for general mounting and holding.

FEATURES & BENEFITS

- High-grade silicone-coated PE release liner facilitates easy unwind.
- Extremely aggressive adhesive for a secure bond.
- Designed for residue-free removal from both adhesive faces.

CONSTRUCTION

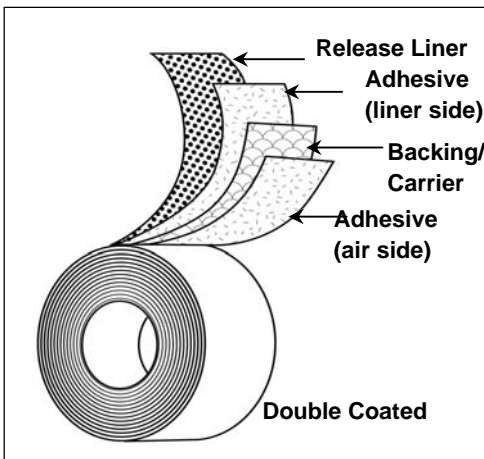

PRODUCT DESCRIPTION

Double Coated Construction

Carrier

- Cloth

Adhesive:

- Differential Rubber

Liner:

- LDPE

Colors:

- Gray (air side)/Natural (liner side)

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Thickness	11 mils	279.40 μ	ASTM D-1000
Adhesion to Steel (Air Side)	40 oz./in.	4.38 N/cm	PSTC-1
Adhesion to Steel (Liner Side)	45 oz./in.	4.93 N/cm	PSTC-1
Tensile Strength	35 lb./in.	61.29 N/cm	ASTM D-1000
Maximum Operating Temperature	200 D F		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To E knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warrant merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.