


# 360-17

## Heavy Duty Foil/Butyl Tape

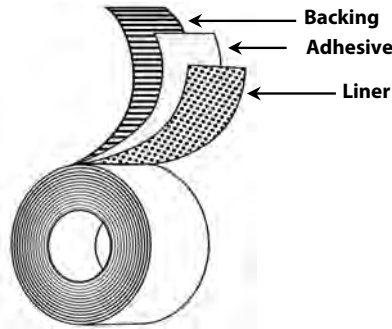

**Backing:** 2 mil Aluminum Foil - Printed

**Adhesive:** Butyl Rubber

**Liner:** Blue LDPE

**Colors:** Aluminum

**Specifications:** Tested in accordance with UL 723 and CAN/ULC-S102-10

**Standard Sizes:** 48mm x 31M, 72mm x 31M

### Applications

- Duct joint sealing for low, medium, and high pressure HVAC systems
- Repairs in aluminum siding, sheet metal, gutters, storage buildings, flashing, containers, and more

### Features

- Aggressive butyl mastic adhesive
- Conformable foil backing
- Low VOC Content

### Benefits

- Provides instant water and air-tight seal
- Resistant to moisture and solvents
- Permanent repairs
- Easy to use in tight spaces. Conforms easily to round, square or odd-shaped objects
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

### Physical Properties

|                              | Standard UOM | Metric UOM | Test Method     |
|------------------------------|--------------|------------|-----------------|
| <b>Total Thickness</b>       | 17 mils      | 431.8 mic  | ASTM D-1000     |
| <b>Foil Thickness</b>        | 2.0 mils     | 50.8 mic   | ASTM D-1000     |
| <b>Adhesion to Steel</b>     | 200 oz/in    | 21.89 N/cm | PSTC-101        |
| <b>Tensile Strength</b>      | 20 lb/in     | 35.03 N/cm | ASTM D-1000     |
| <b>Flame Spread</b>          | 0            |            | CAN/ULC-S102-10 |
| <b>Smoke Developed</b>       | 25           |            | CAN/ULC-S102-10 |
| <b>Operating Temperature</b> | 40 to 200 °F | 4 to 93 °C |                 |
| <b>VOC Content</b>           | <1 g/L       |            |                 |

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038  
 1-800-343-7875 Fax 1-800-328-4822  
 www.berryplastics.com

Nijverheidsstraat 10  
 2260 Oevel (Westerlo) Belgium  
 32-014-722500 Fax 32-014-722570  
 9/18/12