



POLYKEN® 832
Polyethylene Film Tape


APPLICATIONS

- Used in abatement process on glass and Plexiglas for clean removal.
- Used as a surface protection tape.
- Outdoor applications that require UV resistance.

FEATURES & BENEFITS

- UV resistant.
- Excellent for outdoor applications.
- Clean removal adhesive.

CONSTRUCTION

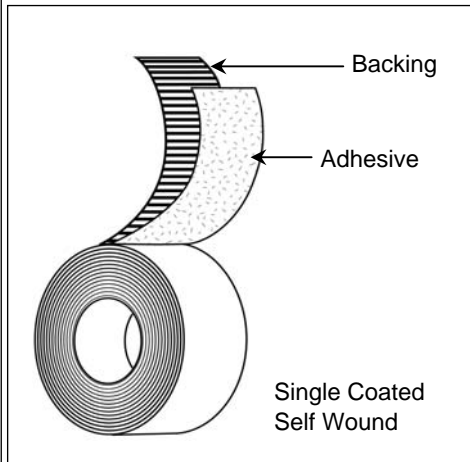

PRODUCT DESCRIPTION

Single-Coated Construction

Backing:

- Polyethylene Film

Adhesive:

- Acrylic

Colors:

- Clear

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	6.5 mils	165.10 μ	ASTM D 1000
Adhesion to Steel	25 oz./in.	2.74 N/cm	PSTC-1
Adhesion to Backing	5 oz./in.	0.55 N/cm	PSTC-1
Tensile Strength	12.5 lb./in.	21.89 N/cm	ASTM D 1000
Elongation (%)	500 %		

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical person To Berry's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any responsibility.