


Polyethylene Film Tape - Colors

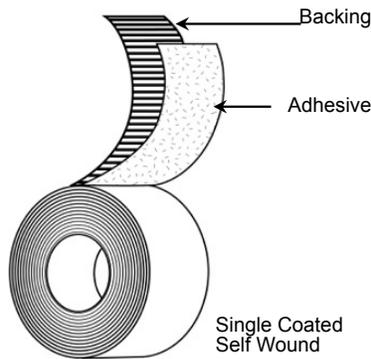

Backing:	LDPE Film
Adhesive:	Acrylic
Liner:	N/A
Colors:	White, Black, Red, Blue, Yellow, Green, Orange
Specifications:	Conforms to US Code of Regs Title 21, Part 175 Indirect Food Additives and Components, Subpart B Sec. 175.105 Adhesives, Part 177 Indirect Additives; Polymer Subpart B, Section 177.152 Olefin Polymers
Standard Sizes:	Incremental widths 1/4" - 54" x 108ft Easy-Tear Version and Master Rolls Also Available

Applications

- | | |
|---|--|
| <ul style="list-style-type: none"> • General purpose sealing • Splicing and seaming • Color coding • Bondbreaker Tape | <ul style="list-style-type: none"> • Temporary hold down • Thermal insulation outerwrap • Industrial fabricating applications • Decorative markings & striping |
|---|--|

Features

- LDPE Film
- Acrylic Adhesive

Benefits

- Conformable for irregular surfaces
- Excellent moisture barrier properties
- High adhesion and cohesion
- Excellent high and low temperature performance
- UV and solvent resistant
- Will not crack or crease
- Permanent bond with virtually no edge bleed
- Excellent long-term aging characteristics
- Low in halogens and leachable chlorides

Physical Properties

	Standard UOM		Metric UOM		Test Method
Total Thickness	5.5	mils	0.140	mm	PSTC-133
Substrate Thickness	4.5	mils	0.114	mm	PSTC-133
Adhesion to Steel	50	oz/in	5.47	N/cm	ASTM D-3330
Tensile Strength	11	lb/in	19.25	N/cm	ASTM D-3759
Elongation	400%				
Application Temperature	50° F to 120 °F		10° C to 49° C		
Operating Temperature	-40° F to 190 °F		-40° F to 88 °C		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.