


Ludlow Tape® M-Tak® HI/LO

Differential Double-Coated Tape

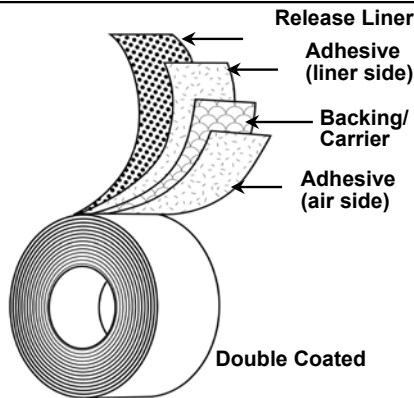

Carrier: Polyester Film
Adhesive: Differential Synthetic Rubber
Liner: 42# SC Kraft with Finger-Lift Edge™

Product Constructions Available

Number	TW	TL	AW
7211	0.5"	1300'	0.25"
7212	0.75"	1300'	0.5"
7212A	0.75"	2000'	0.5"
7216	1"	1300'	0.75"
7216A	1"	2000'	0.75"

Applications

- Labels and business forms
- Signs, posters, and advertisements
- Mailers and envelopes

Features

- Synthetic Rubber Adhesive
- PET Film Carrier
- Finger-lift Edge Liner

Benefits

- Temporary bonding and repositionable on one side
- Permanent adhesive for long term bonding on the other side
- Provides support and structure for added stability
- Conformable
- Easy to start, easy to use
- Liner removes clean and smooth

Physical Properties

	Standard UOM		Metric UOM		Test Method
Tape Thickness (w/o Liner)	3.0	mils	0.076	mm	PSTC 133
Liner Thickness	2.6	mils	0.066	mm	PSTC 133
Overall Thickness	5.6	mils	0.142	mm	PSTC 133
Adhesion to Steel (Air Side)	35	oz/in	3.83	N/cm	PSTC 101 Mod
Adhesion to Steel (Liner Side)	20	oz/in	2.19	N/cm	PSTC 101 Mod
Application Temperature Range	40°F to 105°F		4°C to 41°C		
Operating Temperature Range	-20°F to 160°F		-29°C to 71°C		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

Standard Shelf Life: 12 month from date of shipment assuming recommended storage conditions

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.



25 Forge Pkwy Franklin, MA 02038
 1-800-343-7875 Fax 1-800-328-4822
 www.berryplastics.com

Nijverheidsstraat 10
 2260 Oevel (Westerlo) Belgium
 32-014-722500 Fax 32-014-722570
 11/6/14