


Shadowlastic® Plus - Window & Door Flashing Tape

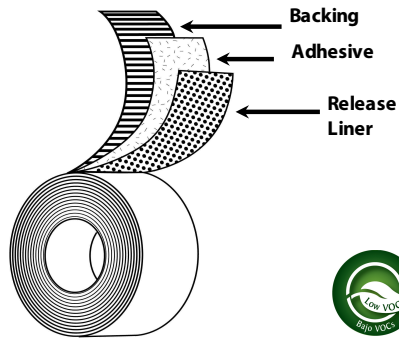

Backing: Woven Polyethylene (Printed)

Adhesive: Butyl Rubber

Liner: Kraft Paper Liner

Colors: Black (w/White Print)

Specifications: AAMA-711, ASTM E2112
15 Year Limited Warranty

Standard Sizes: 4" x 100Ft, 6" x 100Ft, 9" x 100Ft

Applications

- Window and door installations
- Corner board abutments
- Sidewall sheathing seams
- Deck-to-wall joints
- Sealing other detail areas against water and air penetration

Features

- Woven Polyethylene Backing
- Butyl Rubber Adhesive

Benefits

- Conformable and durable
- Excellent air and moisture barrier properties
- Suitable for up to 3 years outdoor UV exposure
- Provides permanent weather-tight seal on most clean, dry building surfaces
- Good all-temperature performance
- Compatible with sealants and caulking
- Self-healing after puncture
- Used properly, can contribute toward requirements for EA Credit 1 (Optimize Energy Performance) under LEED®
- Paper Release Liner
- Easy to remove

Typical Test Values

	Standard UOM	Metric UOM	Test Method
Total Thickness	20.0 mils	0.508 mm	ASTM D-1000
Adhesion to Steel	219 oz/in	23.96 N/cm	ASTM D903-93
Adhesion to Plywood	63 oz/in	6.89 N/cm	ASTM D903-93
Adhesion to OSB	64 oz/in	7.00 N/cm	ASTM D903-93
Adhesion to PVC	162 oz/in	17.72 N/cm	ASTM D903-93
Adhesion to Housewrap	210 oz/in	22.97 N/cm	ASTM D903-93
Tensile Strength	59 lb/in	103.33 N/cm	ASTM D412-97
Installation Temperature	30 to 180 °F	-1 to 82 °C	
Operating Temperature	-30 to 200 °F	-34 to 93 °C	