


## Heat Shrink PE Film Tape

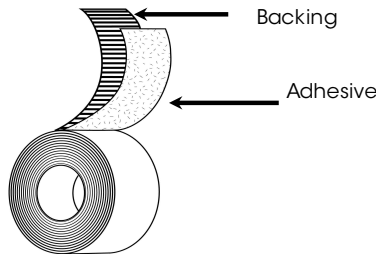

|                        |                        |
|------------------------|------------------------|
| <b>Backing:</b>        | Polyethylene Film      |
| <b>Adhesive:</b>       | Synthetic Rubber       |
| <b>Liner:</b>          | N/A                    |
| <b>Colors:</b>         | White, Clear           |
| <b>Specifications:</b> | N/A                    |
| <b>Standard Sizes:</b> | 48mm x 55m, 96mm x 55m |

### Applications

- Boat wrap industry and other equipment storage and protection uses requiring shrink wrap and heat shrink tape
- Short-term masking for stucco and plaster
- Bundling, wrapping and repairs
- Heavy-duty polyethylene splicing and hanging
- Surface protection
- Dissimilar metal tape
- Labeling and color coding
- Wire hold down (AV cord tape)

### Features

- Polyethylene Film Backing
- Synthetic Rubber Adhesive
- Low VOC, Contains no heavy metals (such as lead and chromium)

### Benefits

- Conformable and flexible
- Excellent durability and solvent resistance
- Low elongation for consistent surface bond
- Pinked/Serrated edge available for hand tearability
- High tack for good quick stick
- Excellent shear strength
- Repositionable and clean removal from many surfaces
- Environmentally friendly & safe to use.

### Typical Test Values

|                                 | Standard UOM | Metric UOM  | Test Method |
|---------------------------------|--------------|-------------|-------------|
| <b>Total Thickness (Colors)</b> | 7.0 mils     | 0.178 mm    | ASTM D-1000 |
| <b>Adhesion to Steel</b>        | 75 oz/in     | 8.21 N/cm   | PSTC-101    |
| <b>Adhesion to Backing</b>      | 35 oz/in     | 3.83 N/cm   | PSTC-101    |
| <b>Tensile Strength</b>         | 25 lb/in     | 43.78 N/cm  | ASTM D-1000 |
| <b>Application Temperature</b>  | 30 to 160 °F | -1 to 71 °C |             |
| <b>Operating Temperature</b>    | 20 to 200 °F | -7 to 93 °C |             |
| <b>Elongation</b>               | 85%          |             |             |

Recommended Storage Conditions: 60-80 °F at 40-60% RH  
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

\* Subject to availability and minimum order