


Multi-Purpose PE Tape

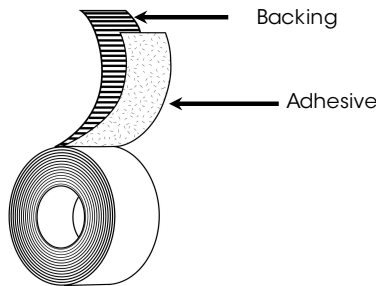

Backing:	Polyethylene Film
Adhesive:	Synthetic Rubber
Liner:	N/A
Colors:	Red, White, Black, Silver, Teal, Blue, Orange, Clear, Pink*, Green*
Specifications:	N/A
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Abatement industry: hang and patch poly sheeting, seal waste disposal bags, etc.
- Labeling and color coding
- Short-term masking for stucco and plaster
- Bundling, wrapping, and repairs
- Wire hold down (AV Cord Tape)
- Convention industry - bundling carpet, securing poly carpet protection, color coding, etc.
- Polyethylene splicing
- Surface protection
- Dissimilar metal tape

Features

Benefits

- | | |
|--|--|
| <ul style="list-style-type: none"> • Polyethylene Film Backing • Synthetic Rubber Adhesive • Low VOC, <u>Contains no heavy metals</u> (such as lead and chromium) | <ul style="list-style-type: none"> • Conformable and flexible • Excellent durability and solvent resistance • Low elongation for consistent surface bond • Pinked/Serrated Edge available for hand tearability • High tack for good quick stick • Excellent shear strength • Repositionable and clean removal from many surfaces • Environmentally friendly & safe to use. |
|--|--|

Typical Test Values

	Standard UOM		Metric UOM		Test Method
Total Thickness (Colors)	7.0	mils	0.18	mm	ASTM D-1000
Adhesion to Steel	75	oz/in	8.21	N/cm	PSTC-101
Adhesion to Backing	35	oz/in	3.8	N/cm	PSTC-101
Tensile Strength	25	lb/in	43.78	N/cm	ASTM D-1000
Application Temperature	30 to 160 °F		-1 to 71 °C		
Operating Temperature	20 to 200 °F		-7 to 93 °C		
Elongation	85%				

Recommended Storage Conditions: 60-80 °F at 40-60% RH
 Standard Shelf Life (at 25 °C): 24 months from date of manufacture.

* Subject to availability and minimum order