


Wire Harness Attachment Tape

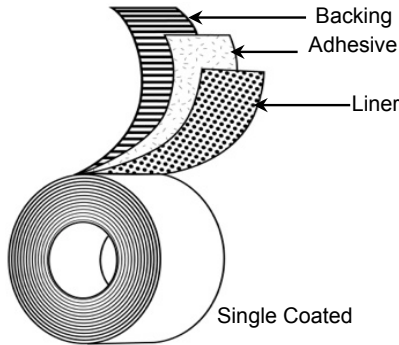

- Backing:** Low Density Polyethylene
- Adhesive:** Acrylic
- Liner:** 66# Clay Coated Paper Liner
- Standard Colors:** Black
- Size Options:** Incremental sizes 1 1/2" - 54" x LY
- Specifications:** GM 9986080

Applications

- Wire harness attachment to headliners, flooring, and other surfaces in automotive, marine, recreational equipment, construction, and more
- Permanent surface attachments
- Anti-squeak, anti-itch headliner barrier
- Alternative to commonly used foil tapes

Features

- Low-density PE Film Backing
- Acrylic Adhesive
- Clay Coated Paper Liner

Benefits

- Conformable for curves and irregular surfaces
- Low weight, cost effective alternative to foil
- Aggressive and permanent bond to headliner and harness surfaces
- Strong, locking bond to fabrics
- Excellent longevity
- Excellent high and low temperature performance
- Smooth clean release - easy to use
- Die cuttable

Physical Properties

| | Standard UOM | | Metric UOM | | Test Method |
|--------------------------------|----------------|-------|---------------|------|-------------|
| Total Thickness | 7.0 | mils | 0.178 | mm | PSTC-133 |
| Backing Thickness | 4.5 | mils | 0.114 | mm | PSTC-133 |
| Adhesive Thickness | 2.5 | mils | 0.064 | mm | PSTC-133 |
| Adhesion to Steel | 120 | oz/in | 13.13 | N/cm | ASTM D-3330 |
| Tensile Strength | 11.5 | lb/in | 20.13 | N/cm | ASTM D-3759 |
| Elongation | 500% | | | | |
| Application Temperature | 50°F to 120°F | | 10°C to 49°C | | |
| Operating Temperature | -40°F to 190°F | | -40°C to 88°C | | |

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.