




5095



PATCO® 5095
Auto Headliner Anti-Squeak, Anti-Itch Tape


APPLICATIONS

- Itching & squeaking prevention within headliner assembly
- Barrier between foam & roof of vehicles
- Alternative to commonly used felt tape
- Wire harness attachment to car headliner & various surfaces

FEATURES & BENEFITS

- Aggressive & permanent bond to headliner foam & various surfaces
- Excellent die-cut ability
- Release liner for ease of application
- Tape will bond aggressively to Dow IMPAXX™ foam
- Cost savings

CONSTRUCTION

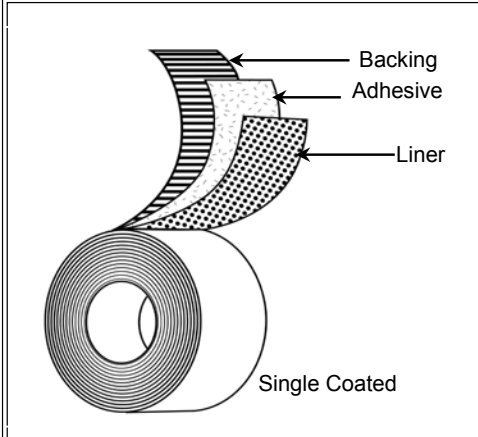

PRODUCT DESCRIPTION

Single-Coated w/Liner Construction

Backing:

- Low Density Polyethylene

Adhesive:

- Acrylic

Liner:

- 66# Clay Coated Paper Liner

Colors:

- Black

Specifications

- GM 9986080

TEST DATA

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	9.5 mils	0.241 mm	PSTC-133
Substrate Thickness	7.0 mils	0.178 mm	PSTC-133
Adhesion to Steel	102 oz./in.	1.116 N/mm	ASTM D-3330
Tensile Strength	20 lb./in.	3.502 N/mm	ASTM D-3759
Elongation (%)	535 %		
Application Temperature Range	50°F to 120°F	10°C to 49°C	
Operating Temperature Range	-40°F to 190°F	-40C to-88C	

**Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any liability.

