


## Acid-Free PE Overlaminating Tape

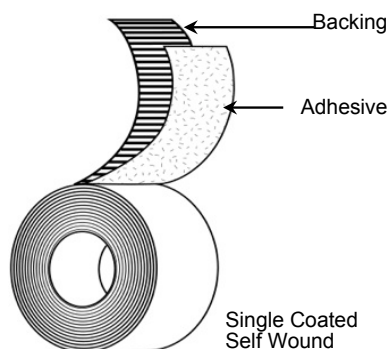

**Backing:** LDPE Film  
**Adhesive:** Acid-Free Acrylic  
**Liner:** N/A  
**Colors:** Clear  
**Specifications:** N/A

**Standard Sizes:** Incremental widths 1/4" - 54" x 60ft

### Applications

- Overlaminating for graphics, signs, and placards
- Surface protection against moisture, UV, solvents, and abrasion

### Features

- LDPE Film
- Acid-Free Acrylic Adhesive

### Benefits

- Tough and abrasion resistant
- UV stable for outdoor applications
- Stands up to harsh environments
- Super clear film for invisible protection
- Adheres aggressively to surfaces
- Non-yellowing
- No edge bleed
- Excellent long-term stability

### Typical Test Values

	Standard UOM		Metric UOM		Test Method
<b>Total Thickness</b>	5.5	mils	0.140	mm	PSTC-133
<b>Substrate Thickness</b>	4.5	mils	0.114	mm	PSTC-133
<b>Adhesion to Steel</b>	70	oz/in	7.66	N/cm	ASTM D-3330
<b>Tensile Strength</b>	12	lb/in	21.02	N/cm	ASTM D-3759
<b>Elongation</b>	450%				
<b>Application Temperature</b>	50 to 120 °F		10 to 49 °C		
<b>Operating Temperature</b>	-40 to 200 °F		-40 to 93 °C		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F

Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.