


## Removable Polyethylene Film Tape

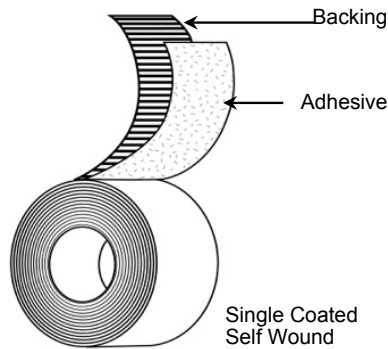

|                        |  |
|------------------------|--|
| <b>Backing:</b>        | LDPE Film                              |
| <b>Adhesive:</b>       | Acrylic                                |
| <b>Liner:</b>          | N/A                                    |
| <b>Colors:</b>         | Clear, Transparent Orange, White, Blue |
| <b>Specifications:</b> | N/A                                    |
| <b>Standard Sizes:</b> | Incremental widths 1/4" - 54" x 108ft  |

### Applications

- Temporary surface protection
- Color coding, product and packaging identification
- Splicing plastic film materials
- Surface and label overlaminate

### Features

- LDPE Film
- Acrylic Adhesive

### Benefits

- Thick and highly conformable
- Abrasion and moisture resistant
- Stands up to mechanical and chemical wear
- Solvent resistant
- Excellent high and low temperature performance
- Removes cleanly - will not leave residue
- Easy to apply

### Typical Test Values

|                                | Standard UOM  |       | Metric UOM   |      | Test Method |
|--------------------------------|---------------|-------|--------------|------|-------------|
| <b>Total Thickness</b>         | 5.5           | mils  | 0.140        | mm   | PSTC-133    |
| <b>Substrate Thickness</b>     | 4.5           | mils  | 0.114        | mm   | PSTC-133    |
| <b>Adhesion to Steel</b>       | 25            | oz/in | 2.74         | N/cm | ASTM D-3330 |
| <b>Tensile Strength</b>        | 11            | lb/in | 19.26        | N/cm | ASTM D-3759 |
| <b>Elongation</b>              | 550%          |       |              |      |             |
| <b>Application Temperature</b> | 50° to 120 °F |       | 10 to 49 °C  |      |             |
| <b>Operating Temperature</b>   | -40 to 190 °F |       | -40 to 88 °C |      |             |

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F  
Standard Shelf Life (at 25C): 12 months from shipment date

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.