




Premium Nuclear Grade Duct Tape

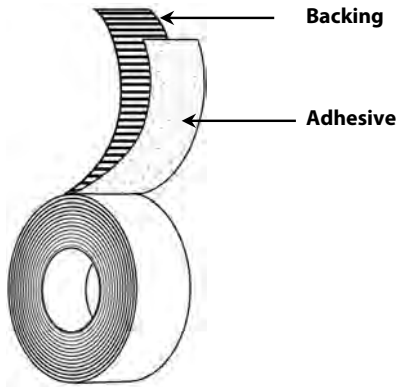

Backing:	PE Coated Cloth
Adhesive:	Rubber
Liner:	N/A
Colors:	Black, Red, Silver, White
Specifications:	Meets NRC Reg 1.38 & ASME NQA-1; Meets Westinghouse APP-GW-Z0-606, Revision 1 requirements when tested. Tested in accordance with UL 723.
Standard Sizes:	48mm x 55m, 72mm x 55m

Applications

- Multiple uses in powerplants and on ships
- Use with nickel-based alloys and austenitic stainless steel
- Holding dosimeters, securing clothing and gloves, wrapping pipe ends, insulation & duct sealing sealing
- Color Coding

Features

- PE-Coated Cloth Backing
- Natural Rubber Based Adhesive
- Low VOC Content

Benefits

- High tensile strength for difficult applications
- Puncture & abrasion resistance
- Crisp, straight tear
- Moisture, solvent & abrasion resistant
- Aggressive adhesion to all surfaces
- Can contribute toward satisfying EQ Credit 4.1 (Low Emitting Materials) under LEED®

Physical Properties

	Standard UOM	Metric UOM	Test Method
Total Thickness	12 mils	304.8 mic	ASTM D-1000
Adhesion to Steel	50 oz/in	6.47 N/cm	PSTC-101
Tensile Strength	30 lb/in	52.54 N/cm	ASTM D-1000
Operating Temperature	40 to 200 °F	4 to 93 °C	
VOC Content	<1 g/L		

Recommended Storage Conditions: 40-60% Humidity, 60°F-80°F
 Standard Shelf Life (at 25C): 36 months from date of manufacture.

The information presented herein was prepared at BERRY PLASTICS CORPORATION (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Berry Plastics' knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state and local laws and regulations. The data are typical values submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which BERRY PLASTICS assumes any legal responsibility.